


MBB C 1000 S



Robust, dependable and efficient

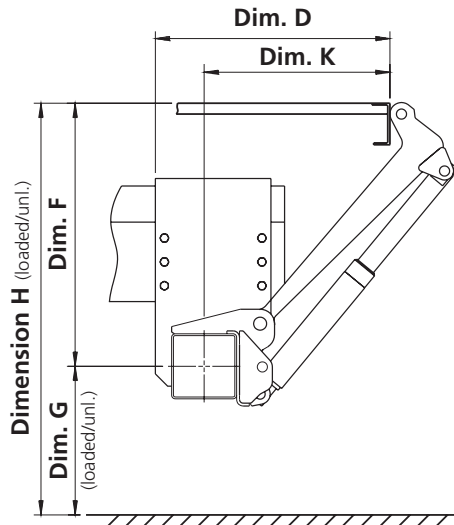

Weights

C 1000 S

Platform type	Alum.
Platform width (mm)	2450
Platform height (mm)	2050
Unit weight (kg)	401
Adds to vehicle (mm)	203*

* Does not include seal kit or pressing

Dimensions


		C 1000 S
Lift arms (in mm)		700
H (max.)	Loading height unloaded	1256
H (min.)	Loading height loaded	906
F (max.)	Middle of main beam to upper edge of loading floor	728
K (min.)	At dimension F (max.)	515
D (min.)	Installation space (min.)	665
F (min.)		529
K (max.)	At dimension F (min.)	710
D (max.)	Installation space (max.)	860

Technical data

		C 1000 S
Lifting capacity		1000 kg
Main beam		180 x 180 mm
Lifting gear hydraulics		2 x lift cylinder / 2 x tilt cylinder
Platform overlap with floor		-57 mm
Lift arm pitch		1310 mm
Load centre - lengthwise		700 mm
Load centre - across centre		50 % of the full load on one side
Inclination angle of the platform		+90° to -10°

Diagram

C 1000 S	
a (mm)	Q (kg)
700	1000



Disclaimer: The specified weights refer to the lightest platforms of the corresponding height. Dimensions may vary. Specifications subject to change without notice.

FEATURES: Fixed control • pendant control • platform auto levelling • roll stops
• flashing lights • foot controls

PALFINGER AUSTRALIA

PHONE: 13 27 26

palfinger.com.au info@palfinger.com.au



MELBOURNE • SYDNEY • NEWCASTLE • BRISBANE • PERTH